



KONGERIKET NORGE
The Kingdom of Norway

REC'D 21 MAY 2004

WIPO

PCT

Bekreftelse på patentsøknad nr
Certification of patent application no



2003 1931

▷ Det bekreftes herved at vedheftede dokument er nøyaktig utskrift/kopi av ovennevnte søknad, som opprinnelig inngitt 2003.04.29

▷ It is hereby certified that the annexed document is a true copy of the above-mentioned application, as originally filed on 2003.04.29

2004.05.11

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Line Reum

Line Reum
Saksbehandler



PATENTSTYRET®
Styret for det industrielle rettsvern

10

PATENTSTYRET

03-04-29*20031931

o: 154206 - ØS/amkh

29. april 2003

PAN Middelware

Søker:

Telenor ASA

Snarøyveien 30

1331 FORNEBU

Oppfinnere:

Do van Thanh

Tore E. Jønvik

Paal Engelstad

Do van Thuan

-adresser opplyses senere.

Tittel:

En virtuell anordning

A Virtual Device

Technical field

- 5 This invention relates to mobile communication systems and mobile data services in general and in particular a Virtual Device for use in such systems.

Technical background

10

- Although mobile and portable devices are getting more and more advanced and incorporating more functions, it is foreseen that in the future a user will make use of more and more devices such as mobile phone, PDA (Personal
15 Digital Assistant), headset, microphone, digital camera, digital camcorder, etc. The user will have to manage all of them and it is not always an easy task even for technicians. It would be nice if the user can consider all the independent devices as one big "Virtual Device" having
20 multiple input and output units and providing a coherent and surround interface to the user [1], [2].

- Commonly a number of add-on units are available for the users of mobile devices (cellular telephones and PDAs), like head-sets, web cameras, external keyboards, printers,
25 etc. These units can be connected to the mobile device through e.g. a cable, an infrared link or a Bluetooth® link. However, the mobile device must be designed for handling these particular external units, and comprise the necessary interfaces and software solutions.

- 30 An expansion of this concept is disclosed in Norwegian patent application no. 1998 5563 to Aktiebolaget LM Ericsson, now abandoned. This application describes a component-based terminal, in which the main component (a processing unit for a mobile telephone) is carried by the

user, and in which secondary components; head-sets, display units, etc., either can be carried on the users body, or be available in the near environment. Thus, the terminal is broken up into many separate functional elements. This means that the resultant terminal can include external facilities like a large stationary display screen, a full size keyboard or a printer that are available in the room where the user is situated at the moment (e.g. in his office); the terminal being configured on-the-fly in order to add in any components that are available. The configuration is controlled by software agents for each individual external unit; the agents being contained in the main component. However, the application does not furnish any more information on how the components interact or how the terminal is configured. The setup is locked to the features which are supported by hardware and software in the main component.

Brief summary of the invention

- 20 It is an object of the present invention to provide a Virtual Device that combine the abilities and resources of several independent devices possessed by the user, like mobile phones, PDAs, etc., by which the user does not have to purchase the resource twice and hence can save money.
- 25 Another object of the invention is to provide a Virtual Device in which the individual devices share resources like processing power, battery power, memory, data, applications, network access points and user-interfaces.
- 30 Still another object is to provide a Virtual Device in which the user stores his setup preferences in a user profile avoiding having to enter his preferences in each individual device.

The objects above are solved in a Virtual Device according to the present invention as claimed in the appended patent claims.

In particular, according to a first aspect of the
5 invention, a Virtual Device composed of a multitude of stationary and/or portable electronic devices is characterized in an Open Device with an available inner structure and a network interface, at least one Closed
10 Device with a closed inner structure and a network interface, at least one Primitive Device arranged to communicate with said Open and Closed Devices and act as a pure slave to said devices, a system and network management software installed in said Open Device, said Open Device being arranged to act as a Personal Area Network
15 controller.

According to a second aspect, the invention relates to a Virtual Device composed of a multitude of stationary and/or portable electronic devices, which is characterized in a
20 multitude of Open Devices each with an available inner structure and a network interface, at least one Closed Device with a closed inner structure and a network interface, at least one Primitive Device arranged to communicate with said Open and Closed devices and act as a pure slave to said devices, a distributed system and
25 network management software installed on said Open Devices, said Open Devices being arranged to act as a Personal Area Network controller.

According to a third aspect, the invention relates to a Virtual Device composed of a multitude of stationary and/or
30 portable electronic devices, which is characterized in an Open Device with an available inner structure and a network interface and/or at least one Closed Device with a closed inner structure and a network interface, at least one Primitive Device arranged to communicate with said Open and
35 Closed Devices and act as a pure slave to said devices, at least one of said Open or Closed Devices being equipped

with a network interface connected to an external network,
a server in said external network on which is installed a
system and network management software, said server being
arranged to communicate with said Open and Closed Devices
5 in order to act as a Personal Area Network controller.

According to a fourth aspect, the invention relates to a
Virtual Device composed of a multitude of stationary and/or
portable electronic devices, which includes a Closed Device
with a closed inner structure and a network interface
10 connected to an external network, at least one Primitive
Device arranged to communicate with said Closed Device or
devices and act as a pure slave to said device or devices,
a server in said external network on which is installed a
system and network management software, said server being
15 arranged to communicate with said Closed Device or devices
in order to act as a Personal Area Network controller.

Brief description of the drawings

The invention will now be described in reference to the
20 appended drawings, in which

Figure 1 is an overview showing devices that might be
included in a Virtual Device in a Personal Area Network
according to the present invention,

Figure 2 is a schematic diagram showing the overall
25 architecture of a Personal Area Network,

Figure 3 is a diagram showing a Virtual Device on a PAN
with a unique Open Device,

Figure 4 is a diagram showing a PAN application structure,

Figure 5 is a diagram showing the organization of the
30 Personal Area Network Middleware for a Virtual Device on a
PAN with a unique Open Device,

Figure 6 is showing a Virtual Device on a PAN with multiple Open Devices,

Figure 7 is showing the Personal Area Network Middleware for a Virtual Device on a PAN with multiple Open Devices,

5 Figure 8 is showing a networked PAN without any Open Device,

Figure 9 shows a Virtual Device on a networked PAN with an Open Device,

10 Figure 10 shows the Personal Area Network Middleware for a Virtual Device on a networked PAN with an Open Device.

Detailed description of the invention

15 With the emergence of local short-range communication technologies such as Bluetooth [3], WLAN [4], HiperLAN, etc. local connectivity between devices is enabled. The devices belonging to a person will form a private Personal Area Network (PAN) where devices appear and disappear dynamically. However, most importantly, connectivity does
20 not necessarily mean communication and many challenging issues must be resolved before devices can collaborate and together form a Virtual Device. This invention proposes and describes a PAN middleware that enables the formation of a Virtual Device on the PAN and that is capable of handling
25 the dynamical presence of devices and the diversity of device types.

This invention can be realized in at least four different embodiments:

- 30 1. An architecture and the necessary middleware functions to realize a Virtual Device based on an isolated PAN (Personal Area Network) with a unique open device

2. An architecture and the necessary middleware functions to realize a Virtual Device based on an isolated PAN with multiple open devices.
 3. An architecture and the necessary middleware functions to realize a Virtual Device based on networked without open device
 4. An architecture and the necessary middleware functions to realize a Virtual Device based on networked with open device
10. In order to realize the Virtual Device, the PAN and his devices must be hidden to the user and his applications and this is done by introducing a PAN middleware.

As shown in Figure 2 the PAN middleware must be capable of handling not only the Personal Area Network but also the heterogeneity and the dynamic of devices. There are precisely these two characteristics that make the PAN middleware different from the traditional Distributed Computing Middleware where the computing nodes are supposed to be stable and equal or at least having the minimum of capabilities e.g. processing, storage, communication, etc.

Indeed, on the PAN there are a variety of devices such as:

- Communications devices (fixed, mobile & IP phones)
- Computing devices (Computer, PC, laptop, PDA, etc.)
- Peripheral devices (Printer, scanner, digital camera, camcorder, etc.)
- Electronic devices (TV, stereo equipment, loudspeakers, etc.)
- Electronic appliances (fridge, espresso machine, washing machine, etc.)

The devices can be:

- On-body or Off Body
- Mobile or stationary
- With or without Network connections

- With or without local wireless connections

It will be necessary to differentiate the device types as follows:

- 5 • *Primitive device*: Simple devices that cannot operate alone but are slave to other devices, e.g. earphone, microphone, display, etc.
- 10 • *Open device*: Devices allowing the installation and execution of PAN Middleware and other applications, e.g. PDA, laptop, workstation, etc.
- 15 • *Closed device*: Devices that can operate stand-alone but are like a black box i.e. its internal structure and functions are totally hidden and communicate with the environment through only well defined interfaces.
- 20 For instance, a digital camera is advanced device having processor, memory, input and output units but does not allow the installation and execution of foreign applications. It communicates with the rest of the world via interfaces like serial, parallel, USB, etc.

Let us now successively consider the following four solutions as follows:

- 25 • Virtual Device on isolated PAN with unique Open device
- Virtual Device on Isolated PAN with multiple Open devices
- Virtual Device on Networked PAN without Open device
- Virtual Device on Networked PAN with Open device

VIRTUAL DEVICE ON ISOLATED PAN WITH UNIQUE OPEN DEVICE

- 30 In this PAN configuration, there is no device having connection with any wired or wireless network. There is only one Open device while the rest is either *Primitive* or *Closed*. Figure 3 shows a Virtual Device on a PAN with two
- 35 primitive devices: microphone and earphone, two *Closed*

devices: Mobile phone and Camcorder, and one Open device: PDA.

In such a PAN it is desirable to achieve the following:

- 5 • All the *Open* and *Closed* devices should have the ability to use the Primitive ones i.e. the mobile phone, the camcorder and the PDA should be able to share the microphone and the earphone. It is worth noting that today, such a device sharing is not
 - 10 supported with Bluetooth.
 - The *Open* devices should have the ability to use *Closed* devices. This is possible although very dependent on the interfaces offered by the *Closed* device. For example, the PDA can only communicate with the mobile
 - 15 phone using the AT command [5] to make e.g. a call request.
 - The *Closed* devices can only use other *Open* or *Closed* devices if they are programmed for that.
- 20 A PAN middleware is necessary to achieve the resource sharing as above. In this case the PAN middleware is located on the PDA since it is the unique device capable of accommodating the PAN Middleware (PANM).
- 25 Let us now define the necessary capabilities and functions for this configuration.

A. Device Profile

- 30 The PANM should be able to detect and to recognize what are the devices present in the PAN, what type they are and what capabilities they have or what service they are offering, e.g. printing, sound input, text displaying, etc. The PANM must have the mechanism to handle the device profiles
- 35 containing device type and capabilities and to do the comparison with detected devices. The definition of device types must be logical and unambiguous definition of device types. It must be logical to address both composite devices

and inherited devices. It must be unambiguous to guarantee the identification of a device type. Ideally, the definition of device types should be standardized.

5 **B. Resource Discovery and Updating**

The Resource Discovery comprises both the Device and Service Discovery. To support the PAN's dynamic where devices appear and disappear, the PANM should be equipped with mechanisms for Device Discovery and Updating. One alternative is to carry out polling periodically. Since Primitive devices may be tied to their master and not visible to other, the PANM should also ask also Open and Closed devices for Primitive devices connected to the device. In a second alternative, the PANM only run the device discovery once and relies on triggering from the network layer to update its device set. In a third alternative, the changes are only updated when an attempt to reach a device upon request from an application fails.

The PANM should also store the present devices. It is hence necessary to have a naming convention, e.g. PDA 1, Mobile 2, etc. The network addresses (IP, Bluetooth, etc.) and protocols for each device must also be saved.

25

C. Device Input and Output redirection

The PANM should be able to redirect an output stream from one device to the input stream of another one. For example the sound output stream from the PDA can be redirected to the earphone and the sound input redirected to the microphone. It must intercept the output stream addressed to a device at an output port, perform the necessary transformation and send it to another device on the PAN. An API (Application Programming Interface) should be defined

35

D. Application/Service Input and output redirection

The input and output redirection should also be done at the application/service level, i.e. one application can be redirected to one device while a second one to another device. However, this capability is more difficult since it depends on the feature of the operating system and may also require a new application structure as shown in Figure 4. An application consists of three components: Core, Input and Output. The Core component contains the main logic of the application and should remain invariant. The Input and Output Components should be specified according to the services supported such as sound input, text input, graphic display, colour printing, etc. If a device offers a service matching the one required then it can be used for the application.

E. User Profile Management

The user and owner of the PAN should be reserved the right to define the following:

- What devices are allowed to participate to his PAN when present within the PAN's coverage.
- How the devices should be used at a particular location or at a particular time or according to a certain timetable. How should the redirection between devices be
- Which device should be internal and which one should be global and visible to the outside world.
- Which applications and their settings
- How should the applications should be distributed among the devices, i.e. how the three components should distributed among devices according to criteria as quality, price, battery level, etc.

In addition, the user must have the ability to alter, remove, and add device and applications at any time and anywhere. These hard requirements put quite a lot of challenge on the design of the User Profile structure and the architecture of the system around it.

F. Interface to the user

Since the user, as owner of the PAN, should be the one
 5 having the right to decide everything, there is a need for
 an application called PAN Control that offers interfaces
 allowing him/her to communicate and control the PAN
 Middleware. As other applications, the PAN Control should
 be also structured as Core, Input and Output and should
 10 support a variety of input and output services.

G. Interface to applications and services

With the apparition of the PAN, a brand new type of
 15 applications called PAN-based applications is born. This
 new type of applications will actively take advantage of
 the unique properties of the PAN: device dynamic and
 resource sharing. A typical example of PAN-based
 applications is an application, which focuses on the
 20 control of existing applications, their parallel execution,
 their flexible and dynamic composition, the distribution of
 their input and output. The PANM should provide an
 Application Programming Interface (API) allowing the
 application access to the PAN capabilities and functions.
 25 Such an API can be implemented in different technologies,
 e.g. Java, CORBA, XML Web service, etc.

H. Summary

30 *Generally, to realize a Virtual Device on an isolated PAN
 with a unique Open device the PAN middleware must be
 installed and executed on this unique Open device.*

As shown in Figure 5 the necessary capabilities and
 35 functions in the PAN Middleware (PANM) in the case of an
 isolated PAN with unique Open Device are:

- Device Profile
- Resource Discovery

- Device Redirection
- Application Redirection
- User Profile Management
- PAN Control
- 5 • PAN API

This PAN configuration depends totally on the central device, the open device and will collapse when the open device disappears, is switched off or runs out of battery.

10 Another disadvantage is the limitation of the resource sharing since most of devices are *Closed* and *Primitive* and hence impenetrable.

VIRTUAL DEVICE ON ISOLATED PAN WITH MULTIPLE OPEN DEVICES

15 In this PAN configuration, there are now multiple *Open* devices, multiple *Closed* devices and multiple *Primitive* devices. Figure 6 shows a Virtual Device on a PAN with two *Primitive* devices: microphone and earphone, two *Closed* devices: Mobile phone and Camcorder, and three *Open*

20 devices: PDA, Laptop and PC.

In such a PAN, in addition to the features identified for the previous case it is desirable to achieve better collaboration and more optimal resource sharing between the

25 *Open* devices. The PANM as defined in the previous case can now be distributed among the *Open* devices.

We present now successively all the possible alternatives for the distribution of the PANM (PAN Middleware) and

30 resource sharing on the *Open* devices.

A. Distributed Operating System

In this alternative, the PAN Middleware is a Distributed

35 Operating System deployed on all the *Open* devices and coupling them tightly as one. Such an alternative demands the implementation of the Distributed OS on all the *Open*

device types and with the rapid growth in type of mobile devices this could be difficult. Another disadvantage is that the device dynamic can create serious problem for the Distributed OS that requires much stability.

5

B. Distributed Computing

In this alternative, the PAN Middleware is a Distributed Computing Middleware, which hides the distribution and communications from the applications and application developers. In order to be able to support PAN, the traditional Distributed Computing Middleware must be extended with functionality to cope with the dynamic of devices. This alternative has an advantage compared to the previous in the sense that there are fewer operating systems and the number of Middleware implementations is lower. On the other, it is important to quantify the overhead introduced and to investigate whether it is acceptable for mobile devices with limited processing and storage capabilities and battery life.

20

C. XML Web Services

In this alternative, the PAN Middleware consists of the logic necessary to expose the capabilities and functions of each Open device as an XML (eXtensible Markup Language) Web services [6]. The other Open devices can hence invoke these Web services by using SOAP (Simple Object Access Protocol) [7]. With the Web service concept unlike the Distributed Computing the distribution is not hidden. Entities know that communicate with remote entities but communication is made simpler by the automatic generation of SOAP message. This alternative requires that a Web service platform is installed on each Open device offering Web service and this could create an overhead to the PAN. However, the devices are more loosely coupled in this alternative and it can cope better with device dynamic.

30

35

D. Application distribution, coordination and control

In this alternative the PAN Middleware performs the distribution, coordination and control of applications based on the application structure: Core, Input and Output. The distribution of the input and output components is already taken care by the Application Redirection Function mentioned earlier. Concerning the Core, it could only be moved and resumed on compatible Open device, i.e. devices capable of supporting it. For example, an application Core written in Java can only be moved to a device having a Java Virtual Machine and not to a MS Windows device. To achieve the application migration, the mobile agent concept can be appropriate since an agent can stop the execution of an application, serialize it, transport it to another device, de-serialize and resume the execution.

E. SUMMARY

Generally, to realize a Virtual Device on an isolated PAN with a multiple Open devices the PAN middleware should be distributed among the Open devices. To achieve the distribution of the PANM and resource sharing between Open devices a new function is introduced in the PANM called Resource Sharing. The Resource Sharing can be realized by one or combination of the approaches: Distributed Operating System, Distributed Computing, XML Web Services or Application distribution, coordination and control. To achieve optimal resource usage a Resource Sharing function is required in the PANM as shown in Figure 7. The necessary capabilities and functions in the PAN Middleware (PANM) in the case of an isolated PAN with multiple Open Devices are:

- Device Profile
- Resource Discovery
- Device Redirection
- Application Redirection
- User Profile Management

- Resource Sharing
- PAN Control
- PAN API

VIRTUAL DEVICE ON NETWORKED PAN WITHOUT OPEN DEVICE

5

In this configuration the Virtual Device does not have any Open device but only either *Primitive* or *Closed* device. Usually as mentioned earlier, without an Open device, the Virtual Device will collapse but fortunately there is a way to remedy the situation if there is one device with network connection.

10

As shown in Figure 8, the mobile phone allows communication with a Computer running PAN Middleware. In this case the PAN can function very well because it is logically equivalent to the configuration *Isolated* PAN with unique Open device if the Computer on the network is considered as a PAN device. This configuration is, however, very interesting since it opens for several relevant usage. Indeed, the network computer can be Home PC or the office workstation that the user always leave behind when traveling but it can still participate and give support to his PAN. This network computer can also be provisioned and managed by a Service Provider that offers PAN service to the users.

15

20

25

SUMMARY

Generally, it is possible to realize a Virtual Device on a networked PAN without any Open Device if the user has an Open device on the network (Internet) running the PANM.

30

1.1.1. VIRTUAL DEVICE ON NETWORK PAN WITH OPEN DEVICE

In this configuration, the PAN has all the device types: Open, Closed and Primitive but also those having network connection. This configuration is logically equivalent with

35

the Isolated PAN with multiple Open devices. However, as shown in Figure 9 in order to reduce the usage of the network connection, it is perhaps desirable not to have tight coupling between the PDA on the PAN and the network computer. The network computer in this case acts as a safe storage and a *Synchronization* function should be added in the PANM (PAN Middleware) as shown in figure 10. The synchronization function ensures the consistency of the Virtual Device data, settings and profiles.

It is also quite useful to include a *Device Software Installation and Updating* function that offer the possibility to search, select, download and install the appropriate software version for a device on the PAN. When the user wants to add a new device in his Virtual Device specific software, e.g. drivers, plug-ins, etc. may be required. The Device Software Installation and Updating function may carry out the necessary operation and allow seamless introduction of new devices to the Virtual Device.

SUMMARY

In a Virtual Device on a networked PAN with Open Device, the Open Devices both on the PAN and on the network (Internet) should run the PANM.

The necessary capabilities and functions in the PAN Middleware (PANM) in the case of a networked PAN with Open Device are:

- Device Profile
- Resource Discovery
- Device Redirection
- Application Redirection
- User Profile Management
- Resource Sharing
- Synchronization
- Device Software Installation
- PAN Control
- PAN API

REFERENCES

- [1] Do, van Thanh, Jønvik Tore, Vanem Erik, Tran, Dao van & Audestad, J.A.: The Device Management Service, Proceedings of The IEEE Intelligent Network Workshop 2001 (IN2001), Boston, USA, ISBN 0-7803-7047-3, May 6-9, 2001.
5
- [2] Vanem Erik, Tran, Dao van, Jønvik Tore & Do, van Thanh: Extending VHE with the Device Unifying Service, Proceedings of The IEEE International Conference on Communications ICC 2002, ISBN 0-7803-7400-2 (softbound) ISBN 0-7803-7401-0 (CD-ROM), New York, USA, April 28 - May 2, 2002.
10
- [3] <https://www.bluetooth.org/>
- [4] <http://standards.ieee.org/getieee802/portfolio.html>
- [5] 3GPP TS 07.07 V7.7.0 (2001-12) Technical Specification Group Terminals; AT command set for GSM Mobile Equipment (ME) (Release 1998)
15
- [6] "Executive Overview: Web Services", The Forrester Brief, Forrester Research Inc. October 2001
- [7] "What are Web Services", DestiCorp Ltd.,
20 http://www.desticorp.com/focus_ws.html

Claims

1. A Virtual Device composed of a multitude of stationary and/or portable electronic devices, characterized in a first Open Device with an available inner structure and a network interface, at least one Closed Device with a closed inner structure and a network interface, at least one Primitive Device arranged to communicate with said Open and Closed Devices and act as a pure slave to said devices, said open and closed devices being connected in a Personal Area Network, a Personal Area Network middleware being installed in said first Open Device, said first Open Device being arranged to act as a Personal Area Network controller.

2. A Virtual Device as claimed in claim 1, characterized in a second Open Device connected to said Personal Area Network.

3. A Virtual Device composed of a multitude of stationary and/or portable electronic devices, characterized in a multitude of Open Devices each with an available inner structure and a network interface, at least one Closed Device with a closed inner structure and a network interface, at least one Primitive Device arranged to communicate with said Open and Closed Devices and act as a pure slave to said devices, said open and closed devices being connected in a Personal Area Network, a Personal Area Network middleware being installed on said Open Devices, said Personal Area Network Middleware being distributed between said Open Devices, said Open Devices being arranged to act as a Personal Area Network controller.

4. A Virtual Device as claimed in claim 3, characterized in that a Web services platform is installed on each Open Device, each Open Device being arranged to invoke Web services running on other Open Devices.

5. A Virtual Device as claimed in claim 1, 2, 3 or 4, characterized in that at least one of said Open or Closed Devices is equipped with a network interface connected to an external network.

5 6. A Virtual Device as claimed in claim 5, characterized in a server in said external network arranged to store a backup copy of information stored in said Personal Area Network, and synchronize said backup copy with said information.

10 7. A Virtual Device as claimed in claim 1, 2, 3 or 4, characterized in that said open device or devices is/are arranged to discover and register any devices present in said Personal Area Network.

8. A Virtual Device as claimed in claim 7,
15 characterized in that said open device or devices is/are arranged to periodically poll the network.

9. A Virtual Device as claimed in claim 1, 2, 3 or 4, characterized in that said open device or devices is/are arranged to redirect an output stream from
20 one device to an input port on another device.

10. A Virtual Device as claimed in claim 1, 2, 3 or 4, characterized in that said open device or devices is/are arranged to redirect an application to a specific device present in said Personal Area Network.

25 11. A Virtual Device as claimed in any of the claims 1, 2, 3 or 4, characterized in that said Open Device or Open Devices is/are arranged to store and maintain a device profile, said device profile including information on at
30 least identity, type, capabilities and services offered by any Open, Closed or Primitive Devices available for said Private Area Network.

12. A Virtual Device as claimed in any of the claims 7-10,
c h a r a c h t e r i z e d i n that said Open Device or
Open Devices is/are arranged to store and maintain a user
profile, said user profile including information on at
5 least which Open, Closed or Primitive Devices that are
members of said Private Area Network, which Open, Closed or
Primitive Devices that are available for said Private Area
Network, redirection information, which Open, Closed or
Primitive Devices that should be visible on an external
10 network, the distribution of services among Open or Closed
Devices present, and the distribution of resources among
Open or Closed Devices present.

13. A Virtual Device composed of a multitude of portable
electronic devices,
15 c h a r a c h t e r i z e d i n an Open Device with an
available inner structure and a network interface and/or at
least one Closed Device with a closed inner structure and a
network interface, at least one Primitive Device arranged
to communicate with said Open and Closed Devices and act as
20 a pure slave to said devices, at least one of said Open or
Closed Devices being equipped with a network interface
connected to an external network which includes a Personal
Area Network server, a Personal Area Network middleware
being installed on said server, said open and closed
25 devices and said server forming a Personal Area Network
operated by said Personal Area Network middleware.

14. A Virtual Device composed of a multitude of portable
electronic devices,
c h a r a c h t e r i z e d i n a Closed Device with a
30 closed inner structure and a network interface connected to
an external network, at least one Primitive Device arranged
to communicate with said Closed Device or devices and act
as a pure slave to said device or devices, a server in said
external network on which is installed a Personal Area
35 Network middleware, said server being arranged to

communicate with said closed device or devices in order to act as a Personal Area Network controller.

15. A Virtual Device as claimed in claim 14,
c h a r a c h t e r i z e d i n that said server is
5 arranged to store a backup copy of information stored in
said Personal Area Network, and synchronize said backup
copy with said information.

16. A Virtual Device as claimed in claim 13, 14 or 15,
c h a r a c h t e r i z e d i n that said server is
10 arranged to discover and register any devices present in
said Personal Area Network.

17. A Virtual Device as claimed in claim 16,
c h a r a c h t e r i z e d i n that said server is
arranged to periodically poll the network.

15 18. A Virtual Device as claimed in claim 13, 14 or 15,
c h a r a c h t e r i z e d i n that said server is
arranged to redirect an output stream from one device to an
input port on another device.

19. A Virtual Device as claimed in claim 13, 14 or 15,
20 c h a r a c h t e r i z e d i n that said open device or
devices is/are arranged to redirect an application to a
specific device present in said Personal Area Network.

20. A Virtual Device as claimed in any of the claims 14-
15,
25 c h a r a c h t e r i z e d i n that said server is
arranged to store and maintain a device profile, said
device profile including information on at least identity,
type, capabilities and services offered by any Open, Closed
or Primitive Devices available for said Private Area
30 Network.

21. A Virtual Device as claimed in claim 16, 17, 18 or 19,
c h a r a c h t e r i z e d i n that said server is
arranged to store and maintain a user profile, said user

- profile including information on at least which Open, Closed or Primitive Devices that are members of said Private Area Network, which Open, Closed or Primitive Devices that are available for said Private Area Network, redirection information, which Open, Closed or Primitive Devices that should be visible on an external network, the distribution of services among Open or Closed Devices present, and the distribution of resources among Open or Closed Devices present.
- 10 22. A Virtual Device as claimed in claim 12 or 21, characterized in an interface to said Personal Area Network middleware allowing a user to control the Personal Area Network middleware.
- 15 23. A Virtual Device as claimed in claim 12 or 21, characterized in an Application Programming Interface to said Personal Area Network middleware allowing an application access to capabilities and functions of said Personal Area Network middleware.
- 20 24. A Virtual Device as claimed in claim 23, characterized in that said Application Programming Interface is implemented in Java or CORBA, or as an XML Web service.



Abstract

A Virtual Device is described which is composed of at least one Open device, e.g. a PDA, laptop or mobile phone that can be programmed, at least one Closed device, e.g. a
5 camcorder or digital camera with a closed inner structure, and a number of Primitive devices, e.g. a head-set or microphone. A middleware installed on one or more Open
Devices or on an external server will act as a operation
system getting the devices to cooperate as one Virtual
10 Device.



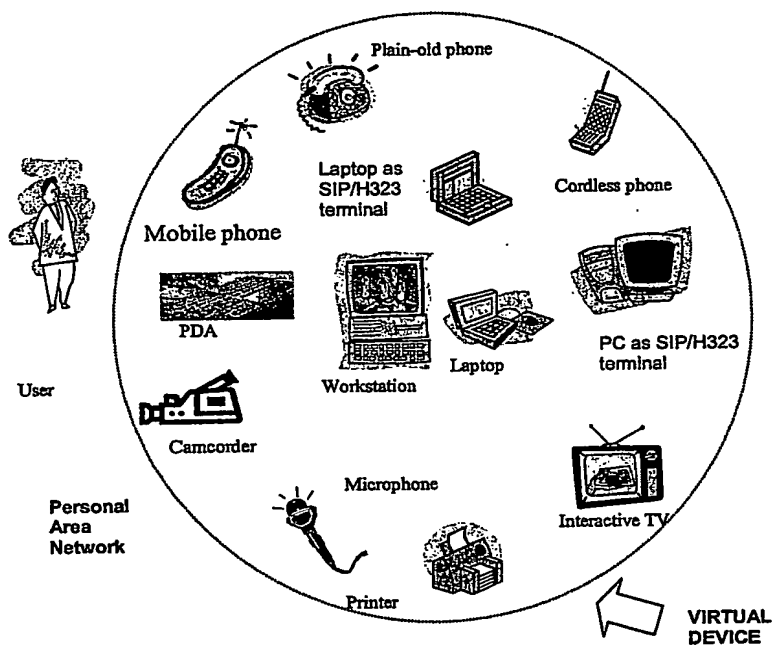



Figure 1 The Virtual Device on PAN



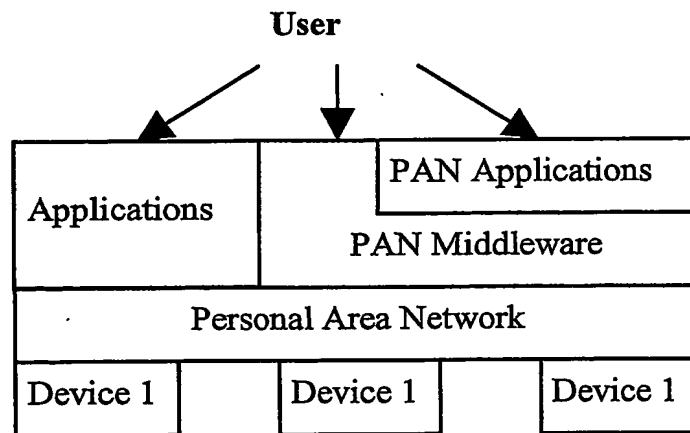



Figure 2 PAN overall architecture



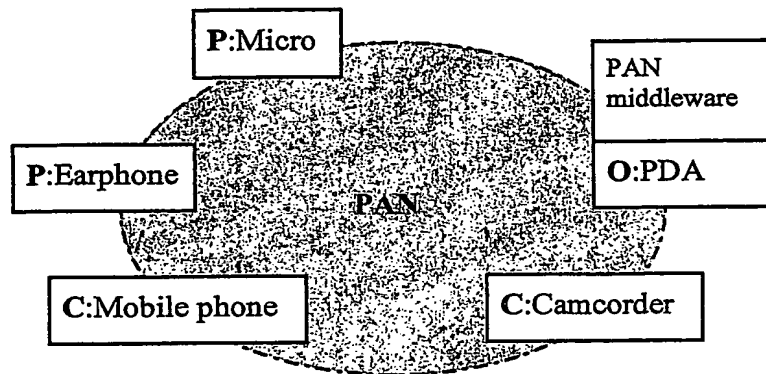


Figure 3 A Virtual Device on a PAN with unique Open device



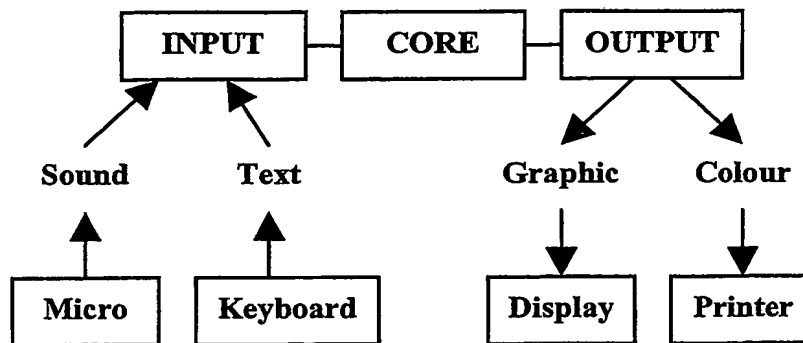



Figure 4 A PAN application structure



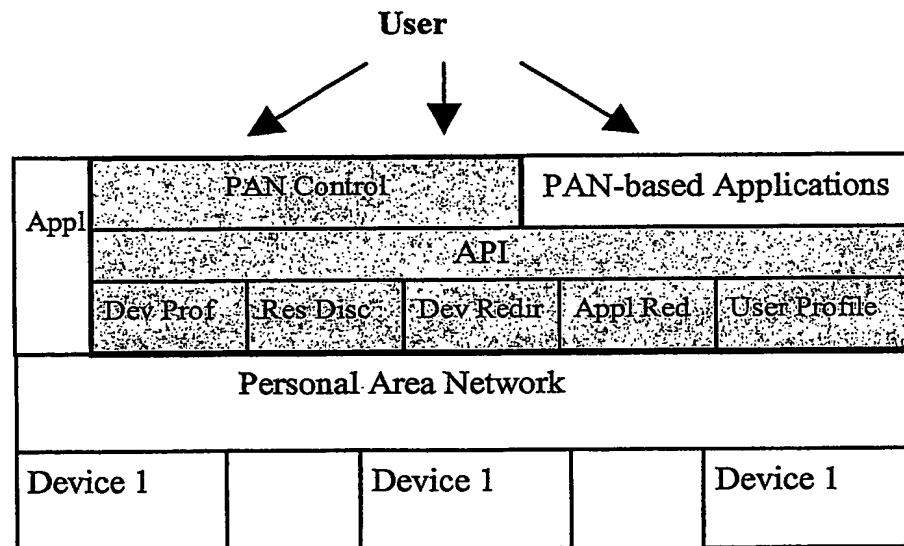


Figure 5 The PANM for the Virtual Device on a PAN with unique Open Device



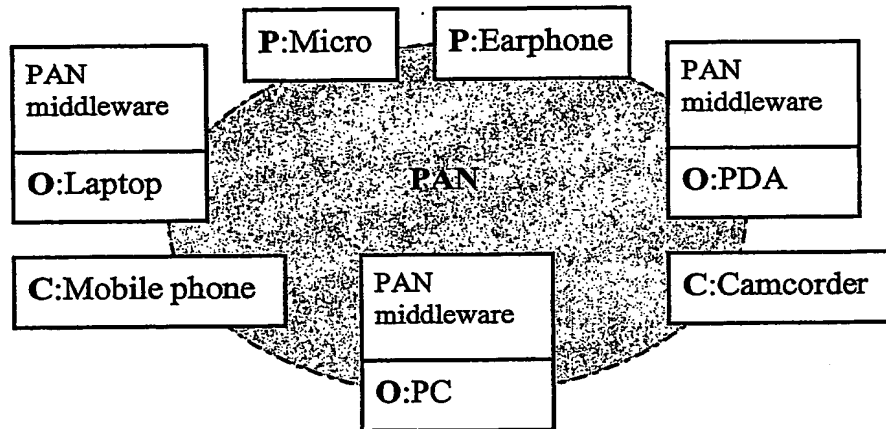


Figure 6 A Virtual Device on a PAN with multiple Open Devices



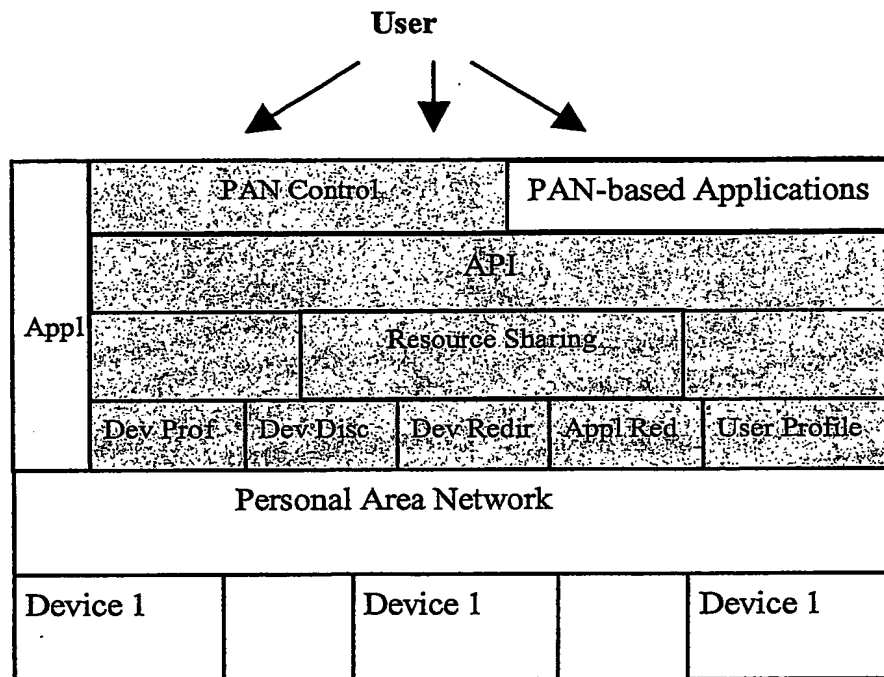


Figure 7 The PANM for the Virtual Device on PAN with multiple Open Devices



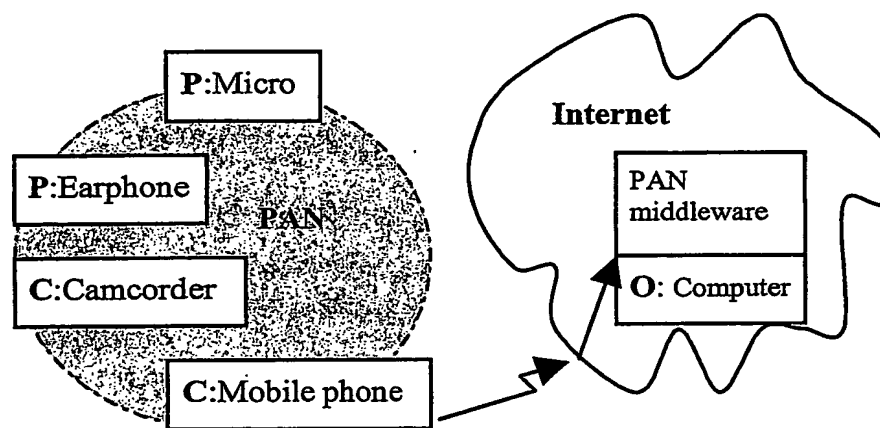


Figure 8 A Networked PAN without Open device

